

PEVNOSTNÍ NÝTY STRUCTURAL



Plochá hlava

OCEL/OCEL



TĚLO: Pozinkovaná ocel A2K

TRN: Pozinkovaná ocel A2K



Testováno dle EN ISO 14589

d1 Ø mm	L Nominální mm	 mm	d2 Ø mm	K mm	W Ø mm	BALENÍ  vnitřní  vevnovní	I Max. mm	 E mm MIN. MÁX.	 (N)	 (N)	Kód zboží
4,8	10,3 13,5	4,90-5,10	9,70	1,80	3,00	2.000 1.500	18,5 24,0	1,5 - 6,8 1,5 - 11,0	5100	3900	G182100 4810 G182100 4813
6,5	14,0 20,0 22,0	6,60-7,00	13,00	2,50	4,00	1.000 1.000 1.000	25,0 35,0 37,0	2,0 - 9,5 2,0 - 16,0 6,0 - 18,0	11200	8800	G182100 6514 G182100 6520 G182100 6522
9,7	22,0	9,90-10,4	20,00	3,70	5,90	300	36,2	3,0 - 15,5	26300	17500	G182100 9722



Pozn.: Tento nýt vyžaduje pro zanátyování speciální násadku!
Pro další informace ke správné aplikaci nás prosím kontaktujte.

PEVNOSTNÍ NÝTY STRUCTURAL



Zapuštěná hlava 100°

OCEL/OCEL



TĚLO: Pozinkovaná ocel A2K

TRN: Pozinkovaná ocel A2K

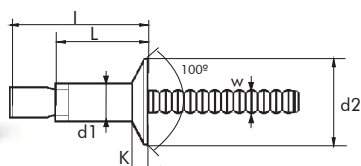

Testováno dle EN ISO 14589

d1 Ø mm	L Nominální mm	 mm	d2 Ø mm	K mm	W Ø mm	BALENÍ  vnitřní  vevnovní	I Max. mm	 E mm MIN. MÁX.	 (N)	 (N)	Kód zboží
4,8	12,3 16,5	4,90-5,10	8,70	1,80	3,00	2.000 1.500	20,0 26,3	3,2 - 8,4 3,2 - 12,2	5100	3900	G182200 4812 G182200 4816
6,5	16,5 22,5	6,60-7,00	10,10	2,00	4,00	1.000 1.000	26,5 35,5	3,0 - 12,0 6,0 - 18,0	11200	8800	G182200 6516 G182200 6522



Pozn.: Tento nýt vyžaduje pro zanátyování speciální násadku!
Pro další informace ke správné aplikaci nás prosím kontaktujte.