



VÍCESVĚRNÉ NÝTY MULTIGRIP

Plochá hlava

HLINÍK/OCEL



TĚLO: Hliník Al Mg 3,5
TRN: Pozinkovaná ocel A1K

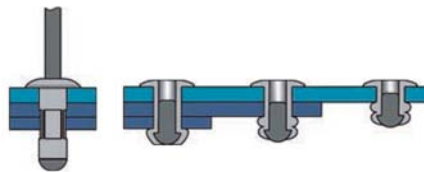

Testováno dle EN ISO 14589

d1 Ø m/m	L Nominální m/m		d2 Ø m/m	K m/m	W Ø m/m	BALENÍ   vnitřní vekovní		I (MÁX.) m/m	 E MIN. m/m MÁX.	 (N)	 (N)	Kód zboží
3,2	8,0	3,30-3,50	6,20	1,10	1,80	500	4.000	10,10	0,5 5,0	630	980	01080003208
	9,5					500	4.000	11,60	1,5 6,5			01080003209
	11,0					500	4.000	13,10	4,0 8,0			01080003211
4,0	6,8	4,10-4,30	8,20	1,40	2,20	500	4.000	10,00	0,5 3,5	1050	1400	010800040068
	9,5					500	3.000	12,00	1,0 4,0			010800040009
	11,0					500	3.000	13,00	2,0 6,0			01080004011
	12,5					500	3.000	15,00	4,0 9,0			01080004012
	16,5					500	3.000	19,00	6,0 13,0			01080004016
4,8	10,5	4,90-5,10	9,90	1,60	2,75	250	2.000	14,00	1,5 6,5	1500	2300	01080004810
	15,0					250	2.000	18,00	4,5 11,0			01080004815
	16,5					250	1.500	20,00	6,5 12,5			01080004816
	19,5					250	1.500	23,00	8,5 14,5			01080004819
	24,5					200	1.200	28,00	12,5 20,0			01080004824



d1 Ø mm	L Nominální mm	BARVENO BÍLE Kód zboží	BARVENO ČERNÉ RAL 9005 Kód zboží	OSTATNÍ BARVY Kód zboží	BALENÍ   vnitřní vekovní
3,2	8,5	01080 BL3208	01080 N03208	01080 3208	500 4.000
	11,0	01080 BL3211	01080 N03211	01080 3211	500 4.000
4,0	6,8	01080 BL40068	01080 N040068	01080 40068	500 4.000
	9,5	01080 BL4009	01080 N04009	01080 4009	500 3.000
	12,5	01080 BL4012	01080 N04012	01080 4012	500 3.000
	16,5	01080 BL4016	01080 N04016	01080 4016	500 3.000
4,8	10,5	01080 BL4810	01080 N04810	01080 4810	250 2.000
	15,0	01080 BL4815	01080 N04815	01080 4815	250 2.000
	16,5	01080 BL4816	01080 N04816	01080 4816	250 1.500
	24,5	01080 BL4824	01080 N04824	01080 4824	200 1.200



VÍCESVĚRNÉ NÝTY MULTIGRIP

Plochá hlava

HLINÍK/OCEL



TĚLO: Hliník Al Mg 2,5
TRN: Pozinkovaná ocel A1K

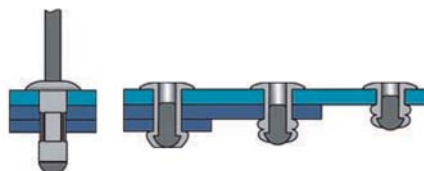

Testováno dle EN ISO 14589

d1 Ø mm	L Nominální mm		d2 Ø mm	K mm	W Ø mm	BALENÍ   vnitřní vekovní		I Max. mm	 E MIN. mm MÁX.	 (N)	 (N)	Kód zboží
6,4	12	6,50	13,00	1,80	3,60	250	1.500	17,00	1,0 - 6,0	2800	4000	01080006412
	15					200	1.200	20,00	4,0 - 9,0			01080006415
	18					200	1.200	23,00	6,0 - 12,0			01080006418